


Surface Mounted Cable Railing Assembly

SEE FASTENER SHEET
FOR FASTENER LISTINGS


END POST TO HAVE 15/32" DRILL HOLE SIZE
FOR CABLE FITTINGS

36" RAIL HEIGHT = 10 LINES
42" RAIL HEIGHT = 12 LINES


INLINE POST DRILL HOLE SIZE FOR
CABLES TO BE DETERMINED BY CABLE SIZE
(SEE TABLE FOR SIZES)




EXCELL SQUARE
WELDED PICKET
TOP RAIL




1.72" INLINE POST WITH
4"x4"x3/8" BASE PLATE



2"x2"x3/16" END POST WITH
4"x4"x1/2" BASE PLATE

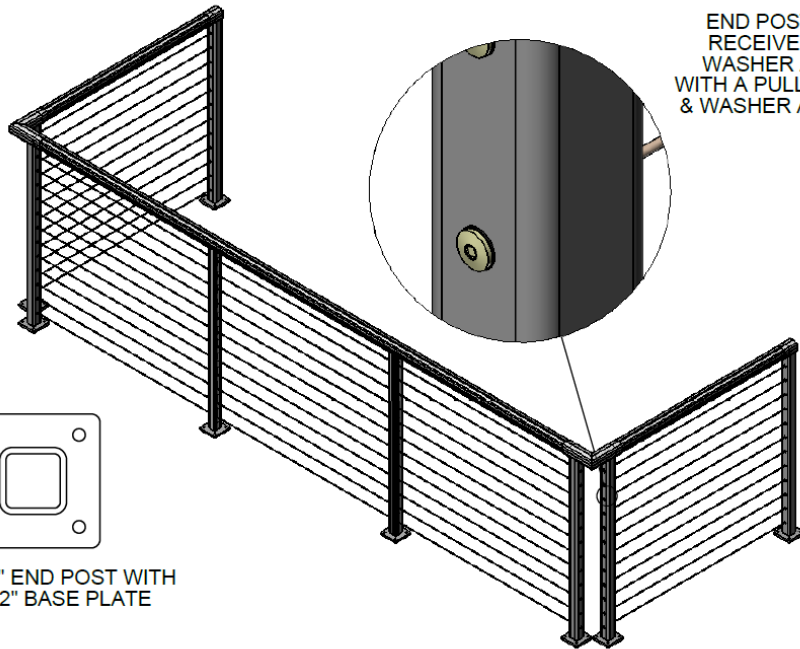


END POSTS TO HAVE
RECEIVER FITTING &
WASHER AT ONE END
WITH A PULL LOCK FITTING
& WASHER AT THE OTHER




SWAGING STUD
S4 - 1/8" CABLE
(THREADS INTO
RECEIVER FITTING)

RECEIVER FITTING
2" R6-32




WASHER FOR FITTINGS
WR6B
DELRON PLASTIC WASHER

PULL LOCK
FITTING
WITH CAP
PUL4-2.03



3 1/8" CONSECUTIVE
DRILL HOLE SPACING

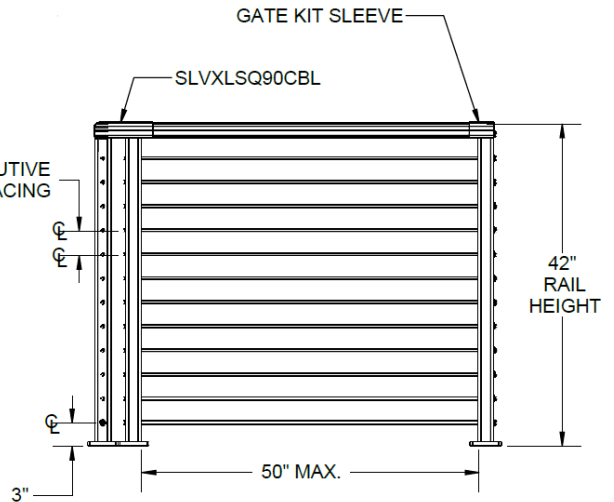

	CABLE SIZE	DRILL HOLE SIZE
INLINE	Ø 1/8"	Ø 1/4"
TENSION	Ø 1/8"	Ø 15/32"