
EXCELL
RAILING SYSTEMS LTD.

SURFACE MOUNTED CABLE RAILING ASSEMBLY

36" RAIL HEIGHT = 10 LINES
42" RAIL HEIGHT = 12 LINES

End Post to have 15/32" drill hole size for cable fittings
Inline post drill hole size for cables to be determined by cable size (See table for sizes)

End Posts to have receiver fitting & washer at one end with a pull lock fitting at the other

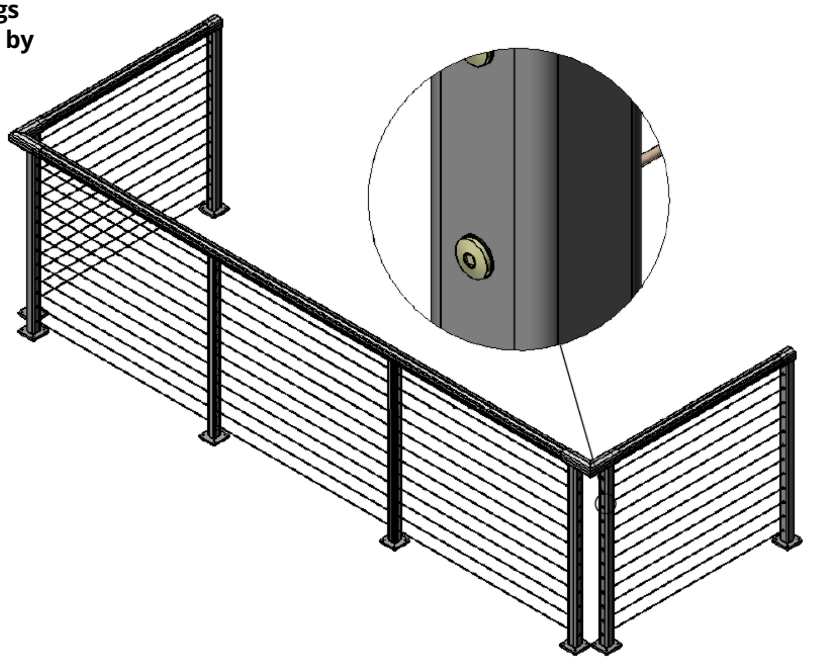



Excell Square Welded Picket Top Rail



1.72" Inline Post with 4" x 4" x 3/8" Base Plate




2" x 2" x 3/16" End Post with 4" x 4" x 1/2" Base Plate


Swaging Stud S4 - 1/8" Cable (Threads into reciever fitting)


Reciever Fitting (2" R6-32)

Washer for fittings (WR6B) Delron Plasic Washer

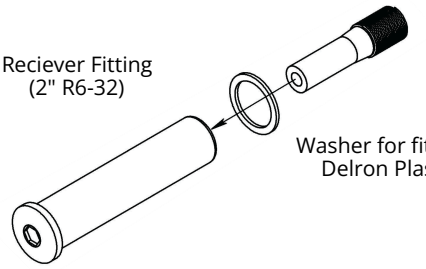

Pull Lock fitting with cap (PUL4-2.03)



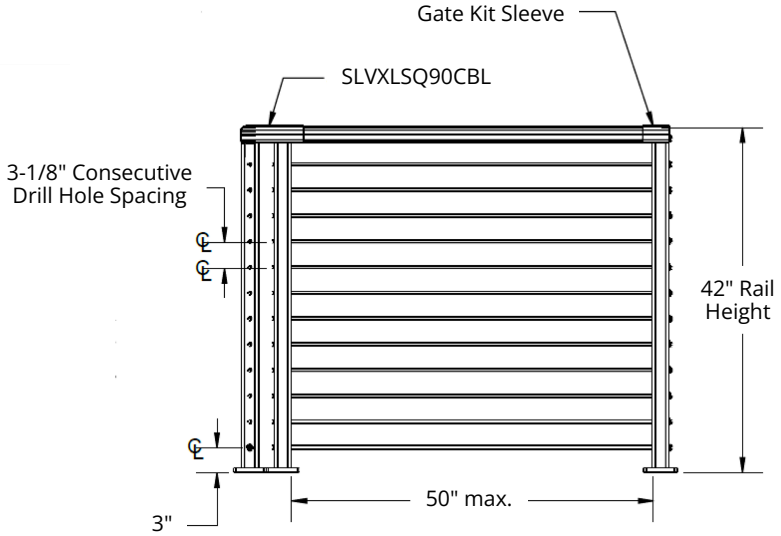

	CABLE SIZE	DRILL HOLE SIZE
INLINE	∅ 1/8"	∅ 1/4"
TENSION	∅ 1/8"	∅ 15/32"

Excell Railing Systems Ltd.
info@excellrailing.com
T: 604-501-0151 | TF: 1-866-999-7245

Excell Kansas City Warehouse
infous@excellrailing.com
Tf: 1-800-338-3568